

P2



A Permanent Patch in 4 Easy Steps:

Patch in almost any weather conditions and eliminate labor-intensive, poor performing patches with the DuraPatcher 4 step process.



1. Clean:
Use high volume low pressure air to clean the patch of debris.



2. Tack:
Prep the patch with a coating of emulsion.



3. Fill:
Inject emulsion coated aggregate and fill pothole.



4. Coat:
Apply a light coating of clean aggregate and open to traffic.

Low Maintenance/Hi-Performance:

The DuraPatcher air-driven system utilizes virtually no moving parts in the delivery system. No augers, conveyors or other wear parts are required making it the most reliable in the industry. Aggregate is gravity fed from the tow vehicle completing the worry-free package. The system will deliver aggregate up to 2.5 inches in diameter without plugging or adjustment.

Ergonomic No-Stress Boom:

The 3 piece boom design provides the ultimate in support for the operator moving the delivery hose. The boom/slide system easily moves throughout the entire 18-foot working radius allowing for smooth patching anywhere in the work zone.

Vent-Flo Nozzle:

The specially designed Vent-Flo nozzle properly coats the aggregate with the right amount of emulsion regardless of aggregate size. The mix is applied at an angle to the repair allowing maximum placement and best operator safety. The vent holes diffuse/slow down the air stream to minimize rock overspray and maximize placement into the repair.



Vent-Flo nozzle with optional heater



Gravity feed delivery




Large temperature gauge



Ergonomic no-stress boom



Overnight heating system

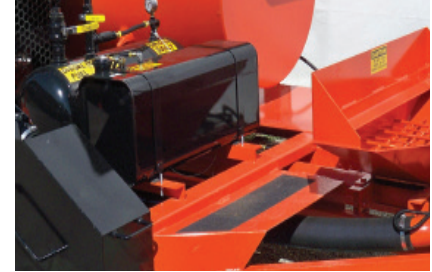

Hitch adjusts for height and distance

SPECIFICATIONS

| | |
|--------------------------------|---------------------------------|
| Emulsion Capacity (US gallons) | 250 |
| Aggregate Capacity | N/A |
| Engine | 74HP IT4 Diesel |
| Heating Method (overnight) | Electric Blanket |
| Heat Rating (watts) | 2 x 1500 W |
| Tank Insulation | R 15 |
| Blower | 450 CFM at 1500 RPM, 10 PSI |
| GVWR (lbs) | 10,400 |
| GAWR (lbs) | 2 x 6000 |
| Axles/ Suspension | 2 (leaf spring) |
| Brake Type | Electric |
| Clean Out | 15 gallons |
| Fuel Capacity | 18 gallons |
| Trailer Construction | 2" x 6" x 1/4" rectangular tube |
| Drain Valve | 3 in. |
| Temperature Gauge | 5 in. |
| Dimensions (l x w x h) | 194" x 96" x 91" |
| Shipping Weight lbs. | 5,560 |
| Warranty | Two Year Limited |

Due to continuous improvement, specifications are subject to change without notice.

PRODUCTS FROM CIMLINE



C1

On-demand Combination Machine



P5

Durapatcher Patching System



T Series

Emulsion Storage Stationary Tanks



Lean more at cimline.com
Phone : 800-328-3874 Email : info@cimline.com